


MODEL

# GC20588 系列

## 直驱式微油针杆离合自动剪线高速双针平缝机

**HIGH SPEED TWO NEEDLE SEMI-DRY DIRECT DRIVE NEEDLE FEED LOCKSTITCHER WITH SPLIT NEEDLE BAR AND THREAD TRIMMER**

**GC20588-MDZ**  
**GC20588-HDZ**  
**GC20588-BDZ**

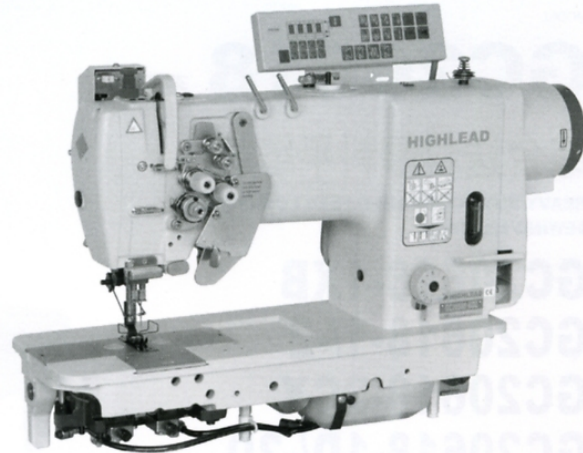


GC20588-MDZ 直驱式微油针杆离合自动剪线高速双针平缝机



本系列机型在设计上采用目前国际上流行的直驱微油方式。针杆部位采用微量供油润滑，既保证了针杆组件的有效润滑，并消除了传统款式针杆部位易渗油的现象。小型内置式、大功率大扭矩的伺服电机直接驱动主轴，机针的贯穿力大大加强，启动停车反应迅速。针杆变换采用新颖机械式离合机构，切换、复位可轻易操作，离合动作顺畅敏捷。两根独立的针杆既可同时工作，也可选择其中一根针杆停止，使之实现转角缝纫。随机搭载的高性能控制系统，使本机具有多种缝纫模式供选择，适用于缝制大衣、制服、牛仔装、布袋、帐篷、伞具等物品。

GC20588-MDZ is designed with needle bar semi dry and mini built-in powerful servo motor for direct drive, which can start and stop quickly with accurate positioning. The novel needle bar disengagement mechanism assures convenient engagement and disengagement of the needle bar, thus two separate needle bars can work together or one needle bar works while the other needle bar stops for corner sewing. The high efficient digital control system offers the selection of different sewing modes. It is available for stitching garment, bag, tent, umbrella, etc.

特殊规格针间距请在订货时指定  
Please specify for special needle gauge when ordering

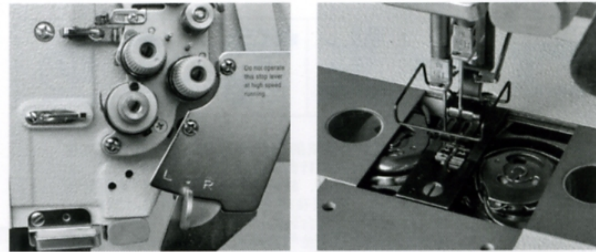

型号 Model	GC20588-MDZ	GC20588-HDZ	GC20588-BDZ
用途 Application	薄料、中厚料 Light to medium heavy weight	中厚料、厚料 Medium heavy weight to heavy weight	
最高缝速 Max. sewing speed	3000 r. p.m.		2800 r. p.m.
线迹长度 Stitch length	0 - 5 mm	0 - 7 mm	
针杆行程 Needle bar stroke	33.4 mm		
压脚提升 Presser foot lift	手动 7mm 膝控 13mm By hand 7mm By knee 13mm		
机针 Needle size	DP × 5 11 <sup>#</sup> -14 <sup>#</sup>	DP × 5 18 <sup>#</sup> -22 <sup>#</sup>	
旋梭 Rotating hook	自动润滑剪线用旋梭 Auto lubrication hook for trimmer		自动润滑剪线用大旋梭 Auto lubrication large hook for trimmer
针间距 Needle gauge	标准 6.4 mm 特殊 3.2 4.8 9.5 mm Standard 6.4 mm special 3.2 4.8 9.5 mm		
操作空间 Working space	264 × 126 mm		
电动机 Motor	220 伏 550 瓦伺服电机 220V 550W Servo motor		