

MODEL


GC20638-D

综合送料针杆离合双针平缝机


TWO NEEDLE COMPOUND FEED SPLIT NEEDLE
BAR LOCKSTITCH SEWING MACHINE

GC20638

Highlead Canada
www.highleadcanada.com

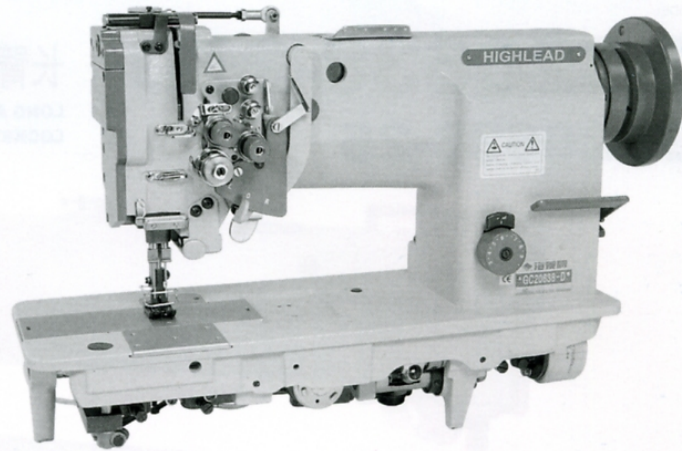


GC20638-D 自动剪线综合送料针杆离合双针平缝机



本机型是专为汽车座垫行业而开发的新品。采用了分离式针杆装置的综合送料双针厚料平缝机。二根针杆可同时工作，也可根据需要独立运动，使缝纫转角时更方便，线迹清晰。上下轴用滚珠轴承支承，同步齿形带传动，柱塞式油泵自动润滑。由于采用综合送料方式，特别适宜于较厚的多层物料车缝，如皮革、泡沫塑料、化纤等几种不同材料的叠层缝纫，不会产生滑移和错位。是缝制汽车座垫、汽车布艺饰件、真皮或合成皮革类的鞋面、运动器材、办公家具、软垫、箱包等类似物品的高档设备。

This machine is a new product specially developed for car seat industry, which is designed with split needle bar to be engaged or disengaged for convenient corner stitching, ball bearing for arm shaft and lower shaft, cog belt driving, plunger oil pump for automatic lubrication. With compound feeding mechanism, it is available for stitching multi-layer material of heavy weight, such as leather, foam plastics, synthetic fabric, etc and can avoid any displacement. It is a high class equipment for stitching car seats, fabric decorations in cars, shoe uppers of leather or synthetic leather, sports apparatus, office furniture, soft cushion, trunk, bag, etc.

特殊规格针间距请在订货时指定
Please specify for special needle gauge when ordering

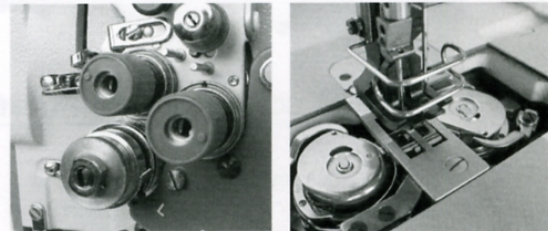

型号 Model	GC20638	GC20638-D
最高缝速 Max. sewing speed	2000 r.p.m.	
针杆行程 Needle bar stroke	33.4 mm	
线迹长度 Stitch length	0-9 mm	
压脚提升 Presser foot lift	手动 By hand	7 mm
	膝控 By knee	13 mm
机针 Needle size	DB × 17 23 [#]	
针间距 Needle gauge	8mm (出厂) 9.5mm (特殊) 8mm (Standard) 9.5mm (Special)	
旋梭 Rotating hook	立式自动 润滑大旋梭 Auto lubricated large hook	立式自动润滑 剪线大旋梭 Auto lubricated large hook for trimming
润滑方式 Lubrication	自动润滑 Auto lubricated	
电动机 Motor	370瓦缝纫机专用 电机 1400 转/分 370W Clutch motor 1400 r.p.m	专用电子调速电机 Speed adj. motor