

MODEL

GC20688 系列

自动剪线综合送料厚料平缝机


HEAVY DUTY COMPOUND FEED LOCKSTITCHER
WITH AUTOMATIC THREAD TRIMMER

GC20688-1/-2

GC20688-1-D/-2-D

GC20688-1BD

GC20688-1BDL/-2BDL

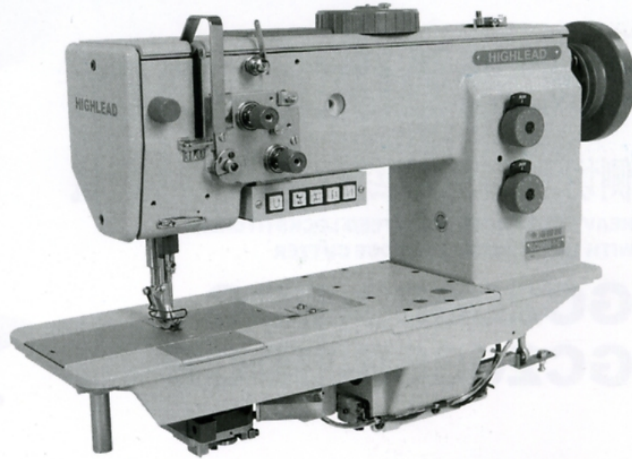

GC20688-1-D 自动剪线单针综合送料厚料平缝机




本系列机型具有自动切线、自动倒缝和自动压脚提升功能及压脚交互运动量切换、针距大小自动切换装置。送料量大、噪音低、切线装置信赖可靠。在缝制过程中可方便地进行不同针距的自动切换(加密缝)。本机采用气动式压脚提升及倒缝,内藏式卷线装置,大型顶置式旋钮可方便地调节设定压脚交互量,并自动调整适当的缝速。倒缝、补针、加密缝、加固缝操作简易。自动润滑装置使本机运转轻滑,经久耐用。适用于缝制各种汽车座垫、车内装饰、布艺家具、帐篷伞具、旅行箱包、体育用品等各种皮革、尼龙、合成皮革、帆布类的中厚料或厚料缝料。

GC20688-1/-2 型单针/双针综合送料厚料平缝机
GC20688-1-D/-2-D 型单针/双针自动剪线综合送料厚料平缝机
GC20688-1BD 型单针自动剪线综合送料厚料平缝机
GC20688-1BDL/-2BDL 型单针/双针长臂自动剪线综合送料厚料平缝机

This machine is designed with automatic thread trimming, automatic back tacking, automatic presser foot lifting, presser foot alternation adjuster and automatic stitch regulator, featuring large feeding amount, quiet performance, reliable thread trimming, easy operation for back tacking, stitch compensation, dense stitching and bartacking. Besides, it adopts pneumatic presser foot lifting, pneumatic back tacking and builtin bobbin winder. The big top dial enables convenient adjustment of presser foot alternating amount and proper sewing speed, and the automatic lubricating system makes the machine run smoothly and durably. It is available in stitching leather, nylon, synthetic leather, canvas for car seat, car interior decoration, upholstery, tent, umbrella, travelling case, traveling bag, sports requisites, etc.

GC20688-1/-2 Single-needle/Twin-needle heavy duty compound feed lockstitcher
GC20688-1-D/-2-D Single-needle/Twin-needle heavy duty compound feed lockstitcher with trimmer
GC20688-1BD Single-needle heavy duty compound feed lockstitcher with trimmer and large hook
GC20688-1BDL/-2BDL Single-needle/Twin-needle Long arm heavy duty compound feed lockstitcher with trimmer

特殊规格针间距请在订货时指定
Please specify for special needle gauge when ordering

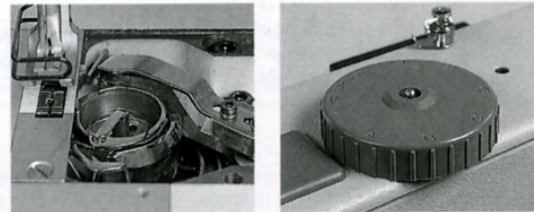

型号 Model	GC20688-1	GC20688-2	GC20688-1-D	GC20688-2-D	GC20688-1BD	GC20688-1BDL	GC20688-2BDL
最高缝速 Max. sewing speed	2800 r.p.m.	2800 r.p.m.	3500 r.p.m.	3200 r.p.m.	2800 r.p.m.	2400 r.p.m.	2400 r.p.m.
线迹长度 Stitch length	0 - 9 mm						
针杆行程 Needle bar stroke	34 mm						
压脚提升高度 Presser foot lift	手动9mm 膝控16mm 9 mm By hand 16 mm By knee		气动 16 mm 16 mm By pneumatic				
机针 Needle size	DP × 17 18 [#] - 25 [#] (标准 18 [#]) (Standard 18 [#])						
旋梭 Rotating hook	1.6 倍大旋梭 Large vertical hook (1.6 times)			特大型旋梭 Extra large hook			
压脚交互运动量 Presser foot alternation	1.5 - 7 mm						
针间距 Needle gauge	—	3,4,6,8, 10,12mm	—	3,4,6,8, 10,12mm	—	—	3,4,6,8, 10,12mm
压脚自动提升装置 Auto presser foot lifter	—		气缸式 Pneumatic				
交互运动量切换装置 Presser alternation adjuster	—		气缸式 Pneumatic				
安全装置 Safety device	标准配置 (Standard)						
润滑方式 Lubrication	自动润滑 Auto lubricated						
倒缝装置 Reverse feeding device	手动气缸助力 Manual or pneumatic		自动倒缝 Auto reverse feeding				
作业空间 Working space	300 × 120 mm					710 × 120 mm	
电动机 Motor	500瓦缝锁机专用 电机 1400 转/分 500W Clutch motor 1400 r.p.m.		750 瓦伺服电机 750W Servo motor				