


MODEL


GC20698-5/-6 系列

综合送料厚料平缝机 HEAVY DUTY COMPOUND FEED LOCKSTITCHER

GC20698-5
GC20698-5T
GC20698-6
GC20698-6T

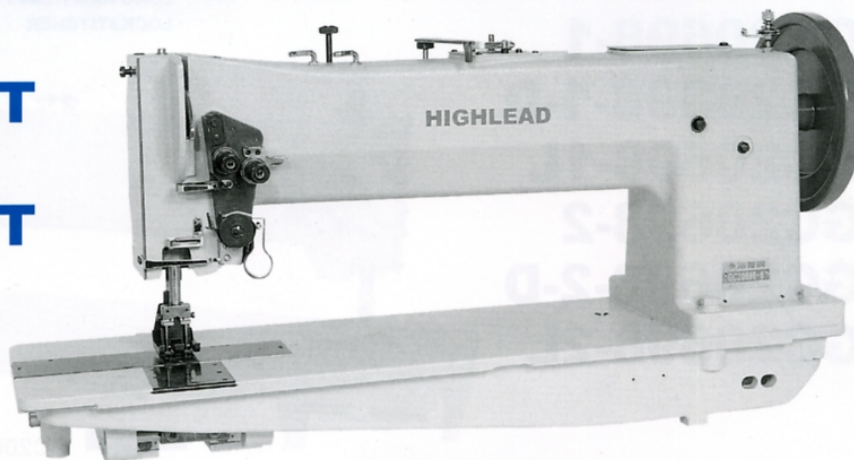

GC20698-6 综合送料双针厚料平缝机

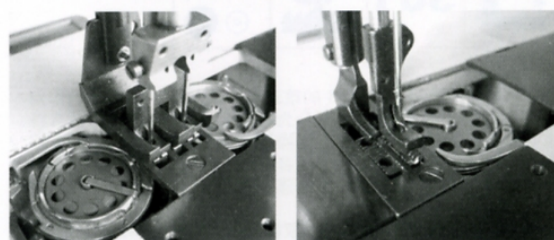

本系列机型是海菱综合送料厚料平缝机的加长型，采用大型立式旋梭勾线、滑杆挑线。分为单针、双针两种机型。上下轴用轴承支承，同步齿形带传动。采用针杆摆动与压脚、送布牙同步送料方式。整机在综合性能上传动轻滑、噪音低、耐用度高、操作空间大，并设有保护旋梭超负荷的离合装置，确保了缝制品和旋梭的安全。特别适用于汽车座垫、安全带、安全气囊等汽车饰件的缝制，还可适用于帐篷、降落伞等大型器具的缝制。本机选用550瓦电子调速电机，加装专用配件，即可达到自动抬压脚，自动倒缝，自动定针位功能。

GC20698-5/-6 型单针 / 双针综合送料厚料平缝机
GC20698-5T/6T 型单针 / 双针综合送料厚料平缝机(附拖布轮装置)

This series is one of the long arm types of Highlead brand compound feed heavy duty lockstitch sewing machines, which is designed with large vertical rotating hooks for thread loop catching and sliding bars for thread up-taking. It has been sub-classed into single needle and two needle. The application of needle bearings for arm shaft and hook shaft, cog belt driving, compound feeding by needle bar, presser foot and feed dog provides this series with such splendid features as smooth running, quiet working, long service life and large working space. It is also equipped with a safety clutch to prevent the hooks from damage by over-duty operation. So it is especially available in stitching car seats, safety belts, safety air bags, tents, parachutes, etc. This series can be used with 550W speed adjustable motor and other optional attachments for automatic presser foot lifting, automatic reverse feeding and automatic needle positioning.

GC20698-5/-6 Single needle/Twin-needle heavy duty compound feed lockstitcher.

GC20698-5T/6T Single needle/Twin-needle heavy duty compound feed lockstitcher with puller.

特殊规格针间距请在订货时指定
Please specify for special needle gauge when ordering



型号 Model	GC20698 - 5	GC20698 - 5T	GC20698 - 6	GC20698 - 6T
最高缝速 Max. sewing speed	1200 r.p.m.			
线迹长度 Stitch length	10 mm			
针杆行程 Needle bar stroke	47.3 mm			
压脚提升高度 Presser foot lift	20-28 mm	28 mm	20-28 mm	28 mm
机针 Needle size	DY × 3 26 [#]			
旋梭 Rotating hook	大型立式旋梭 Large vertical hook			
润滑方式 Lubrication	手工润滑 Manual			
针间距 Needle gauge	—		9.5 mm 标准 (Standard)	
工作空间 Working space	508 × 145 mm			
拖布轮装置 Puller device	—	✓	—	✓
电动机 Motor	550 瓦缝纫机专用电机 1400 转 / 分 550W Clutch motor 1400r.p.m.			
气动倒缝装置 Pneumatic reverse feeding device	✓	✓	✓	✓
气动压脚提升装置 Pneumatic foot lifting device	✓	✓	✓	✓