

MODEL

GC24018 系列

立柱式平缝机

POST-BED SEWING MACHINE

GC24018 GC24018-1 GC24018-A

Highlead Canada
www.highleadcanada.com




GC24018-1 立柱式双针平缝机

本系列机型系专为缝制皮鞋、运动鞋鞋帮、皮包、手套等类似物品设计的柱式缝台平缝机。采用滑杆挑线、立式水平旋梭勾线，形成双线锁式线迹。上下轴采用高精度螺旋伞齿轮传动，旋钮式针距调节装置及杠杆式倒缝装置，使操作者更显轻松。高度 178 毫米的柱式缝台，配合滚轮压脚，令操作空间宽敞、缝制回旋翻转灵活。本机针杆行程大，穿孔能力强、运转平稳，噪音低、采用手工注油方式润滑、机件构造简洁、维护保养便利，适用于普通及中厚物料的立体及拐角缝制。

It adopts sliding bar thread take-up and vertical rotary hook to form two-thread lockstitch. The arm shaft and hook shaft transfer the drive by high-precision spiral bevel gear. Push-button stitch regulator and lever style back-sewing device make the machine operating easily. It is designed with post-bed of 178mm in height and provided with roller presser foot to perform sewing in wide space under arm. It features manual lubrication, simple structure, low noise, smooth running and easy maintenance. It is available for corner sewing on leather shoes, sport shoes, leather bags, gloves and other similar articles.

特殊规格针间距请在订货时指定
Please specify for special needle gauge when ordering

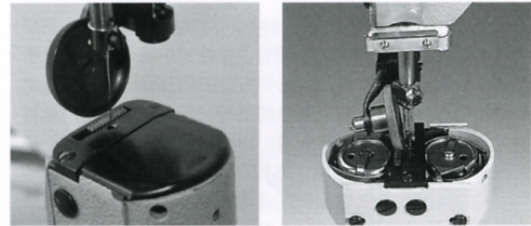

型号 Model	GC24018	GC24018-1	GC24018-A	
最高缝速 Max. sewing speed	3000 r. p. m.			
针杆行程 Needle bar stroke	33.4 mm			
挑线杆行程 Thread take-up lever stroke	61.5 mm			
针距长度 Stitch length	0 - 4 mm			
压脚 提升高度 presser foot lift	手动 By hand	7.2 mm	5 mm	平压脚 Flat presser-foot
	膝控 By knee	10 mm	7.5 mm	
机针 Needle size	DP × 5 14 [#] -18 [#]			
润滑方式 Lubrication	手工润滑 Manual			
旋梭 Hook	标准立式旋梭 Standard vertical hook			
缝台高度 Highness of post-bed	178 mm			
针间距 Needle gauge	—	2.4 3.2 4.0 mm	—	
电动机 Motor	370 瓦缝切机专用电机 370W Clutch motor			