

MODEL

GC24628-1

立柱式综合送料针杆离合双针平缝机

TWO NEEDLE POST BED COMPOUND FEED SPLIT
NEEDLE BAR LOCKSTITCH SEWING MACHINE

GC24628-25

HIGHLEAD CANADA
WWW.HIGHLEADCANADA.COM



本机是海菱高台双针机系列中的新款，立柱式缝合，综合送料，分离式针杆机构。二根机针既可同时工作，也可根据需要独立运动，使缝绉转角时更方便、线迹清晰、更适合圆弧面物料的缝绉。由于采用综合送料方式，特别适用于较厚的多层物料之车缝。如皮革、泡沫塑料、化纤等几种不同材料的叠层缝绉，不会产生滑移和错位。是缝制汽车坐垫、汽车布艺饰件、真皮或合成皮革类的鞋面、运动器材、办公家具、软垫、箱包等类似物品的高档设备。

GC24628-1 立柱式综合送料针杆离合双针平缝机

GC24628-25 长臂型立柱式综合送料针杆离合双针平缝机


This machine is a new product of Highlead brand post bed two needle lockstitch sewing machine series, which is designed with post bed, compound feeding mechanism and split needle bar mechanism. The two needles can be engaged or disengaged for convenient corner stitching and clear stitches, especially available for stitching on surfaces with radius. With compound feeding mechanism, it is available for stitching multi-layer material of heavy weight, such as leather, foam plastics, synthetic fabric, etc and can avoid any displacement. It is a high class equipment for stitching car seats, fabric decorations in cars, shoe uppers of leather or synthetic leather, sports apparatus, office furniture, soft cushion, trunk, bag, etc.

GC24628-1 Two needle post bed compound feed split needle bar lockstitch sewing machine


GC24628-25 Long arm two needle post bed compound feed split needle bar lockstitch sewing machine

特殊规格针间距请在订货时指定

Please specify for special needle gauge when ordering

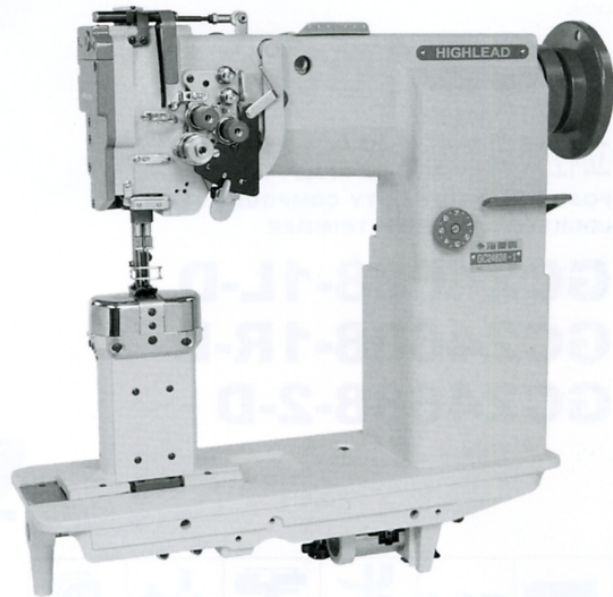

GC24628-1 立柱式综合送料针杆离合双针平缝机

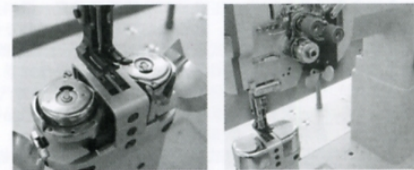

型号 Model	GC24628-1	GC24628-25
最高缝速 Max. sewing speed	2000 r.p.m.	1600 r.p.m.
针杆行程 Needle bar stroke	33.4 mm	
线迹长度 Stitch length	0 - 7 mm	
压脚提升 Presser foot lift	手动 By hand 7 mm 膝控 By knee 13 mm	气动抬压脚 Pneumatic foot lifting 13 mm
倒缝装置 Pneumatic reverse feeding device	手动 By hand	气动 Pneumatic
机针 Needle size	DP × 17 23 [#]	
针间距 Needle gauge	8mm (出厂) 4.8 9.5 12.7mm (特殊) 8mm (Standard) 4.8 9.5 12.7mm (Special)	
缝台高度 Highness of post-bed	178 mm	
旋梭 Rotating hook	立式自动润滑大旋梭 Auto lubricated large hook	
润滑方式 Lubrication	半自动润滑 Semi-auto lubricated	
电动机 Motor	370 瓦缝纫机专用 电机 1400 转 / 分 370W Clutch motor 1400 r.p.m.	220 伏 550 瓦 伺服电机 220V550W Servo motor
操作空间 Working space	250 mm × 280 mm	635 mm × 280 mm