

MODEL

GK500-4 系列

高速三针绷缝机

HIGH SPEED THREE-NEEDLE INTERLOCK
CHAINSTITCHER


GK500-4 GK500-402

GK500-4D GK500-403

GK500-401 GK500-404

HIGHLEAD CANADA

WWW.HIGHLEADCANADA.COM

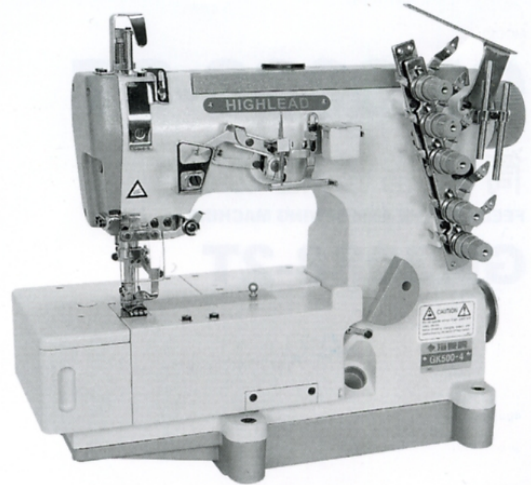

GK500-4 高速三针绷缝机


本机是海菱工业缝制设备的新机种，采用三直针、单弯针勾线，单绷针绷线、针杆挑线，形成605线迹。主要部件采用优质钢材或高级铝合金制造。主要部位装有滚针轴承，同步齿形带传动，下差动调节简单快捷，按钮式针距调节轻松方便，穿线部位宽敞容易操作。全密封齿轮泵供油润滑、回油，运转轻滑、噪音低、经久耐用。本机经与各种附件装置恰当组合(需另购)，用途更为广泛，适用于各类针织弹性面料的搭接缝、覆盖缝、装饰缝工序。如男女内衣裤、运动装、T恤、针织时装等。是针织行业高效率的缝制设备。

- GK500-4 高速三针绷缝机(基本型)
- GK500-4D 高速三针绷缝机(自动剪线)
- GK500-401 高速三针绷缝机(上滚条用)
- GK500-402 高速三针绷缝机(覆盖缝)
- GK500-403 高速四针六线绷缝机
- GK500-404 高速三针绷缝机(上花边松紧带用)

This machine is a new product of Highlead brand industrial sewing machines. It produces Stitch 605 by three straight needles, one looper, one spreader and needle bar thread taking-up. The key parts are made of fine quality steel or fine quality aluminium alloy. Needle bearings and timing belts are used in key driving positions. It has many outstanding features such as easy adjustment of bottom differential feeding, easy knob type stitch regulation and easy threading. The fully sealed gear pump is equipped for machine lubrication and oil recycle which enables the machine to run smooth, quiet and durable. Different attachments (optional) can offer a much wider usage of the machine which covers lap seaming, covering seaming and decorative seaming for underwears, sportswears, T-shirts, knitting fashion, etc. Surely it is highly efficient equipment for knitting garment industry.

- GK500-4 High speed three-needle interlock chainstitcher (Basic model)
- GK500-4D High speed three-needle interlock chainstitcher (Auto trimmer)
- GK500-401 High speed three-needle interlock chainstitcher (Tape binding)
- GK500-402 High speed three-needle interlock chainstitcher (Cover seaming)
- GK500-403 High speed four-needle six thread interlock chainstitcher
- GK500-404 High speed three-needle interlock chainstitcher (Elastic or lace attaching)

针间距规格请在订货时指定
Please specify for needle gauge when ordering

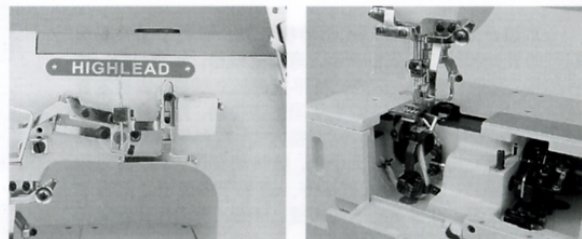

型号 Model	GK500-4	GK500-401	GK500-402	GK500-403	GK500-404	GK500-4D
最高缝速 Max. sewing speed	6000 r.p.m.			4200 r.p.m.	5000 r.p.m.	6000 r.p.m.
线迹长度 Stitch length	4.4 mm			3.3 mm	4.4 mm	
机针数 Number of needle	3			4	3	
缝线数 Number of thread	5			6	5	
机针 Needle size	UY-128GAS 9 [#] -10 [#]			SM x 1014B 10 [#]	UY 128GAS 9 [#] -10 [#]	
针间距 Needle gauge	5.5 6.4	4.0 4.8	5.6 6.4	5.6 6.4 6.0	5.6 6.4	
差动比 Differential ratio	0.5 -1.3					
压脚提升 Presser foot lift	5.5 mm					
电动机 Motor	370 瓦缝纫机专用电机 370W Clutch motor					220 伏 550 瓦 伺服电机 220V/550W Servo motor