

MODEL

# GC24608 系列

## 立柱式综合送料缝纫机

POST-BED COMPOUND FEED LOCKSTITCH SEWING MACHINE

**GC24608-1L**

**GC24608-1R**

**GC24608-2**

**GC24608-2Q**



GC24608-2 立柱式综合送料缝纫机

本系列机型是海菱高台机的新产品，采用综合送料方式和立柱式缝台。

本系列机型根据缝制品的需要分双针、单针。单针机型又可分为左缝台和右缝台两种，以满足不同的需要，立柱式缝台使操作空间宽敞，缝料回转灵活，缝纫顺畅自如，线迹均匀美观；采用翻动式旋梭盖，使换取梭芯更方便。本系列机型最适合于缝制汽车座垫、箱包、皮靴及手提袋等产品。

GC24608-1L/1R 型单针立柱式综合送料平缝机(左缝台/右缝台)

GC24608-2 型双针立柱式综合送料平缝机

GC24608-2Q 型双针立柱式综合送料平缝机(气动抬压脚、气动倒缝)


This machine series is a new product series of Highlead brand post bed lockstitch sewing machines. It is designed with compound feed mechanism and post bed. It has three sub models of single needle left-side stitching machine, single needle right-side stitching machine and two needle post bed compound feed machine, to meet different demands from the market. With the features of free stitching, beautiful stitches, easy bobbin changing, it is available for stitching car seat, bag and case, boots, hand bags, etc.

GC24608-1L/1R Single needle post-bed compound feed lockstitcher (Lift-side stitching bed/Right-side stitching bed)

GC24608-2 Twin-needle post-bed compound feed lockstitcher

GC24608-2Q Twin-needle post-bed compound feed lockstitcher (Pneumatic foot lifter, Pneumatic reverse feeding)

特殊规格针间距请在订货时指定  
Please specify for special needle gauge when ordering

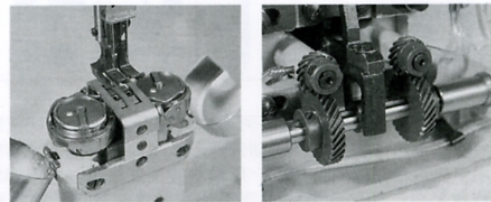

型号 Model	GC24608 -1L	GC24608 -1R	GC24608 -2	GC24608 -2Q
最高缝速 Max. sewing speed	2000 r.p.m.			
针杆行程 Needle bar stroke	36 mm			
线迹长度 Stitch length	0-7 mm			
压脚提升 Presser foot lift	手动 8 mm 8 mm By hand		膝控 16 mm 16 mm By knee	气动 16 mm Pneumatic
压脚交互量 Presser foot alternation	2-6 mm			
机针 Needle size	DP × 17 22 <sup>#</sup> -24 <sup>#</sup>			
针间距 Needle gauge	—		标准 8 mm (Standard) 特殊 9.5 mm (Specid)	
缝台高度 Highness of post-bed	178 mm			
缝台位置 Bed type	左缝台 Left-side stitching bed	右缝台 Right-side stitching bed	—	—
润滑方式 Lubrication	半自动润滑 Semi-auto lubricated			
旋梭 Rotating hook	手动加油水平大旋梭 Manual lubricated large hook			
气动倒缝装置 Pneumatic reverse feeding device	—		✓	
气动抬压脚装置 Pneumatic foot lifting device	—		✓	
电动机 Motor	370 瓦缝纫机专用电机 1400 转 / 分 370W Clutch motor 1400r.p.m.		550 瓦伺服电机 550W Servo motor	
变速脚踏板 Standing operation pedal	—		选购装置 Optional device	